



Project Rocky Multipurpose Building

CANNONDESIGN

360 Madison Ave. 11th Floor
New York, NY 10017
P: 212.972.9800
F: 212.972.9191

www.cannondesign.com

Cerami Associates
1001 Avenue of the Americas, 4th Floor
New York, NY 10018
212-370-1776

Security 101
1450 Centrepark Blvd., Suite 210
West Palm Beach, FL 33401
800-261-2041

AVI-SPL
6301 Benjamin Rd., Suite 101
Tampa, FL 33634
888-559-8197

V-Soft Consulting
101 Bull Lane, Suite #205
Louisville, KY 40222
502-425-8425

**PAULLUS, SOKOLOWSKI
AND SARTOR, L.L.C.**

3 MOUNTAINVIEW ROAD
P.O. BOX 4039
WARREN, NJ 07059
PHONE: (732) 560-9700

CERTIFICATE OF AUTHORIZATION NO. 24G280329700

ALL DIMENSIONS UNLESS OTHERWISE NOTED BY THE CONTRACTOR SHALL BE IN ACCORDANCE WITH THE CONSTRUCTION SPECIFICATIONS AND SHALL BE USED FOR THE CONSTRUCTION OF ANY IMPROVEMENTS SPECIFIED HEREIN. CONTRACTORS SHALL NOTIFY THE DESIGN ENGINEER TO OBTAIN CONSTRUCTION DOCUMENTS.

UNLESS THESE CHANGES ARE SPECIFICALLY IDENTIFIED AS MODIFICATIONS, THESE CHANGES SHALL NOT BE USED FOR CONSTRUCTION OF IMPROVEMENTS SPECIFIED HEREIN. CONTRACTORS SHALL NOTIFY THE DESIGN ENGINEER TO OBTAIN CONSTRUCTION DOCUMENTS.

COPYRIGHT 2022 PAULLUS, SOKOLOWSKI AND SARTOR, L.L.C. ALL RIGHTS RESERVED.

ROBERT ESPASA, P.E.
PROFESSIONAL ENGINEER
N.J. LIC. NO. 43454

SIGNATURE _____ DATE _____


1	PLANNING BOARD SUBMISSION	05-27-2022
Rev.	Description	Date

Organization:	PS&S
Building:	MULTIPURPOSE BUILDING ADDITION AT BUILDING 820
Facility Location:	
Legacy Document Number:	
Legacy Revision:	

SITE DETAILS


Project No.: 035170008C Checked by: RE

C-10

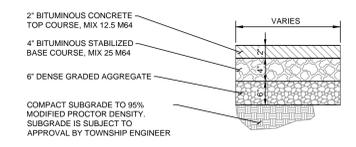


4 FULL DEPTH ASPHALT PAVEMENT

SCALE: N.T.S.

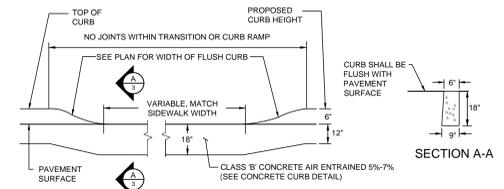


3 FLUSH CONCRETE CURB

SCALE: N.T.S.

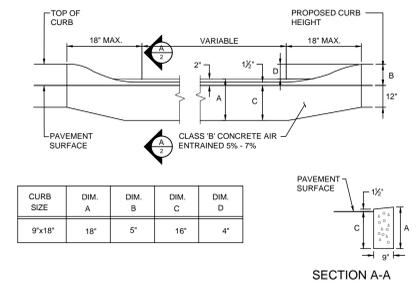


2 DEPRESSED CONCRETE CURB

SCALE: N.T.S.

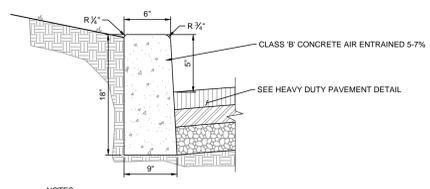

1 CONCRETE CURB

SCALE: N.T.S.

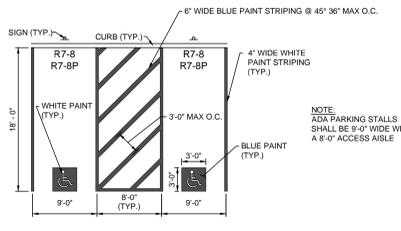


7 TYPICAL ADA PAVEMENT MARKINGS

SCALE: N.T.S.


- NOTES:
- ALL SIGN PARAMETERS TO CONFORM TO THE CURRENT 'MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS'.
 - ALL POSTS SHALL BE OF ADEQUATE LENGTH TO MEET THE REQUIREMENTS FOR ERECTION AS STATED IN THE CURRENT 'MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS'.
 - ALL POSTS SHALL BE EMBEDDED 4' MINIMUM.
 - ALL STREET POSTS AND BRACKETS SHALL BE CUT, BENT AND HOLES FINISHED AND DRILLED BEFORE GALVANIZING. GALVANIZING SHALL BE IN CONFORMANCE WITH CURRENT A.S.T.M. SPECIFICATION A123.
 - POSTS SHALL BE 2" PIECE U-POST IN CONFORMANCE WITH THE NOTES BELOW.
 - BOLTS SHALL NOT PROTRUDE MORE THAN 1/2" BEYOND THE NUT WHEN TIGHT, BUT SHALL ENGAGE ALL THREADS IN THE NUT.
 - IN AREAS WHERE GROUND MOUNTED SIGN SUPPORTS CANNOT BE SUFFICIENTLY OFFSET FROM THE PAVEMENT EDGE, SIGN SUPPORTS SHOULD BE OF A SUITABLE BREAKAWAY OR YIELDING DESIGN (SEE NJDOT MANUAL).
 - THE HEIGHT TO THE BOTTOM OF A SECONDARY SIGN MOUNTED BELOW ANOTHER SIGN MAY BE 1' LESS THAN THE APPROPRIATE HEIGHT SPECIFIED.

NOTE:
PAINT SHALL BE:
PRIMER 1989 NJDOT SPEC. D
912.15 YELLOW PAINT 1989 NJDOT
SPEC. NO. 912.31

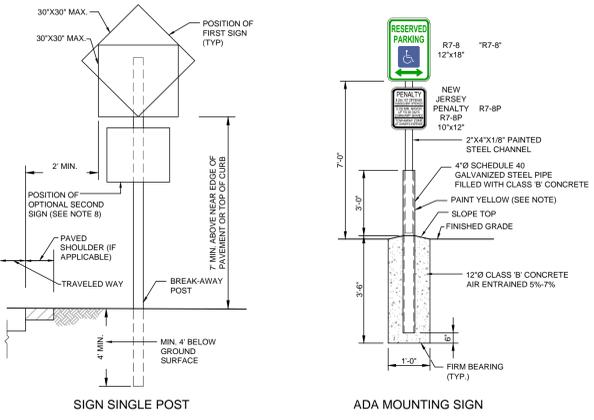


6 TYPICAL SIGN MOUNTING

SCALE: N.T.S.

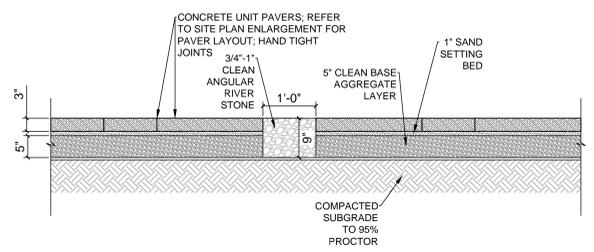


10 HANOVER CONCRETE UNIT PAVERS 12\"/>

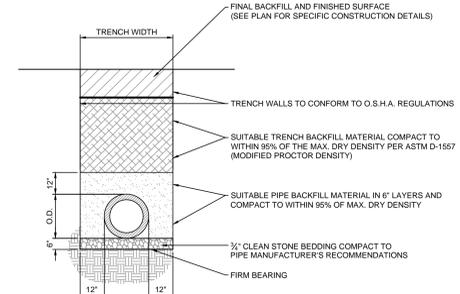


11 EXPOSED AGGREGATE CONCRETE SIDEWALK

SCALE: N.T.S.

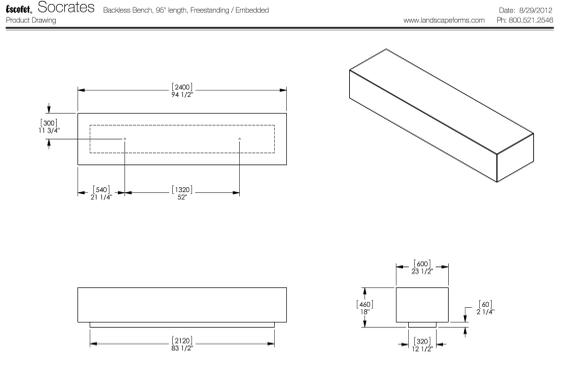


9 8' LONG SOCRATES BENCH BY LANDSCAPE FORMS

SCALE: N.T.S.

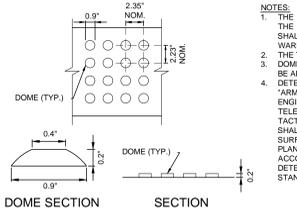

8 DETECTABLE WARNING SURFACE

SCALE: N.T.S.

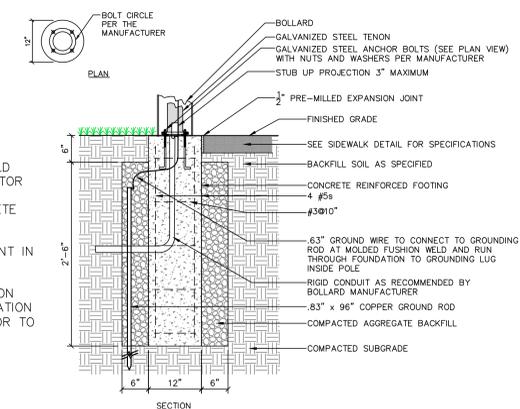

- NOTES:
- VERTICAL AND HORIZONTAL BARS SHALL BE FIELD TIED. WELDING IS NOT PERMITTED. THE CONTRACTOR SHALL SUPPORT REINFORCEMENT IN ITS PROPER LOCATION FROM THE FORMWORK DURING CONCRETE OPERATION.
 - THE CONTRACTOR SHALL REMOVE WATER PRESENT IN HOLE PRIOR TO POURING CONCRETE.
 - THE CONTRACTOR SHALL VERIFY ALL INFORMATION PERTAINING TO THE POLE AND FIXTURE INSTALLATION WITH THE MANUFACTURER, THE ENGINEER AND/OR TO BE NOTIFIED OF ANY DISCREPANCIES.
 - INSTALLATION OF POLE FOOTING IN CONCRETE PAVING REQUIRES 3/4\"/>


14 BOLLARD FOOTING DETAIL

SCALE: N.T.S.



13 3' TALL LIGHT BOLLARD

SCALE: N.T.S.

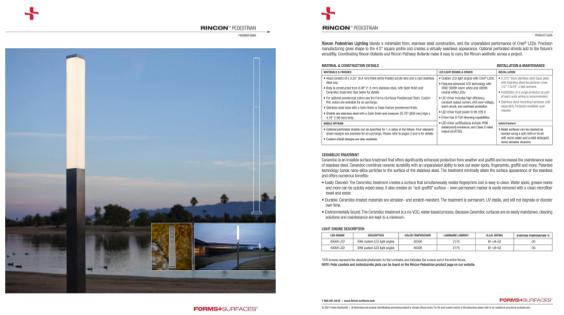

12 10' TALL PEDESTRIAN LIGHT

SCALE: N.T.S.